




DIMENSIONS – GAS BOILERS

LYNX COMBI

**Modulating Condensing - High Efficiency
with Domestic Hot Water Generator**

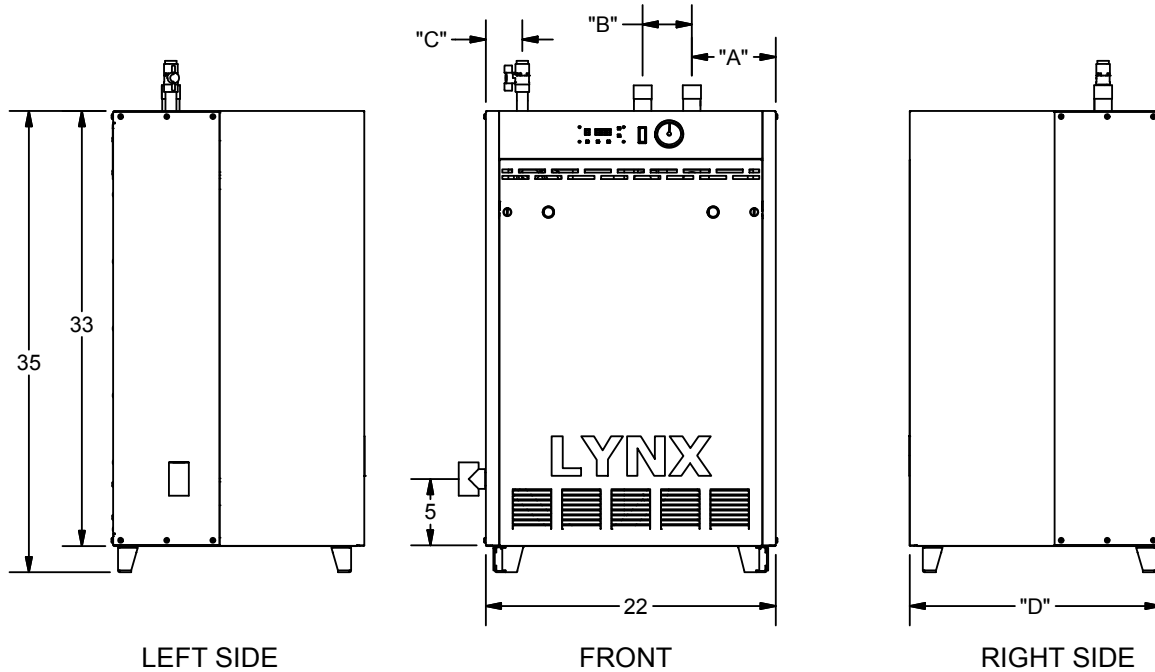

BOILER MODEL	"A"	"B"	"C"	"D"
LX-90	6 3/4	3 3/8	2 3/4	16 1/4
LX-120	6 5/8	3 3/8	2	16 1/4
LX-150	6 3/8	3 3/4	2 3/4	19

Model	AFUE	Input Max Btuh	Input Min Btuh	D.O.E. Heating Capacity	Net I=B=R Output	Exhaust Vent	Air Intake	Water Volume	Supply & Return Piping	Gas Pipe	Dimensions	Dry Boiler Weight
LX-90*	95%	90,000	25,000	80,000	70,000	3" Schedule 40 PVC, CPVC or SS	3" Schedule 40 PVC, CPVC or SS	0.4 Gal	1" NPT (Male)	1/2 NPT (Female)	35" H 22" W 16.25" D	118 lbs.
LX-120†	95%	120,000	30,000	106,000	92,000	3" Schedule 40 PVC, CPVC or SS	3" Schedule 40 PVC, CPVC or SS	0.6 Gal	1" NPT (Male)	1/2 NPT (Female)	35" H 22" W 16.25" D	125 lbs.
LX-120CB†												147 lbs.
LX-150†	95%	150,000	37,500	133,000	116,000	3" Schedule 40 PVC, CPVC or SS	3" Schedule 40 PVC, CPVC or SS	1.1 Gal	1" NPT (Male)	1/2 NPT (Female)	35" H 22" W 19" D	140 lbs.
LX-150CB*												162 lbs.